


Alloy Shackles

(meets the performance requirements of RR-C-271 & EN13889)

- ◆ Tested & Certified
- ◆ High Quality
- ◆ Fully Embossed for Easy Identification
- ◆ Safety Factor 6:1
- ◆ Galvanised Finish


Screw Pin Dee

Product Code: ADS-SCR

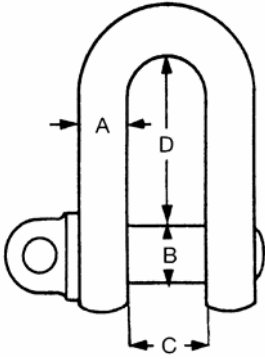

Screw Pin Bow


Product Code: ABS-SCR



W.L.L.	A	B	C	D		2E	WEIGHT
				BOW	DEE		
Tons	mm	mm	mm	mm	mm	mm	EACH Kgs
0.33	5	6	9.5	22	-	16	0.02
0.5	7	8	12	29	25	20	0.05
0.75	9	10	13.5	32	27	21	0.11
1.00	10	11	17	36.5	31	26	0.15
1.5	11	12	18.5	43	37	29	0.21
2.00	13.5	16	22	51	43	32	0.37
3.25	16	19	27	64	51	43	0.65
4.75	19	22	31	76	59	51	1.06
6.5	22	25	36	83	73	58	1.56
8.5	25	28	43	95	85	68	2.32
9.5	28	32	47	108	90	75	3.28
12.00	32	35	51	115	94	83	4.51
13.5	35	38	57	133	115	92	5.93
17.00	38	42	60	146	127	99	7.89
25.00	45	50	74	178	149	126	13.4
35.00	50	57	83	197	171	138	18.85
55.00	65	70	105	254	208	180	37.86
85.00	90	96	146	381	-	-	60


Nut & Bolt Pin Dee

Product Code: ADS-SAF



Nut & Bolt Pin Dee

Product Code: ABS-SAF



W.L.L.	A	B	C	D		2E	WEIGHT
				BOW	DEE		
Tons	mm	mm	mm	mm	mm	mm	EACH Kgs
0.5	7	8	12	29	-	20	0.07
0.75	9	10	13.5	32	-	21	0.13
1.00	10	11	17	36.5	-	26	0.17
1.5	11	12	18.5	43	-	29	0.25
2.00	13.5	16	22	51	43	32	0.44
3.25	16	19	27	64	51	43	0.79
4.75	19	22	31	76	59	51	1.26
6.5	22	25	36	83	73	58	1.88
8.5	25	28	43	95	85	68	2.78
9.5	28	32	47	108	90	75	3.87
12.00	32	35	51	115	94	83	5.26
13.5	35	38	57	133	115	92	6.94
17.00	38	42	60	146	127	99	8.79
25.00	45	50	74	178	149	126	14.99
35.00	50	57	83	197	171	138	20.65
55.00	65	70	105	254	203	180	41.05
85.00	75	80	127	330	230	190	62.24
120.00	90	95	146	381	267	238	110